

This drawing is our exclusive property. Without our consent this drawing may not be reproduced or given to third.

Valid when no tolerance for angle is given (length of shorter side)


Valid for trials enquiries only

Valid when no tolerance is given

Explanation of Dimension	ISD-marks	Deviations
--------------------------	-----------	------------

...10 ±1°	10...50 ±30'	50...120 ±20'	120... ±10'
--------------	-----------------	------------------	----------------

...6 ±0.1	6...30 ±0.2	30...120 ±0.3	120... ±0.5
--------------	----------------	------------------	----------------

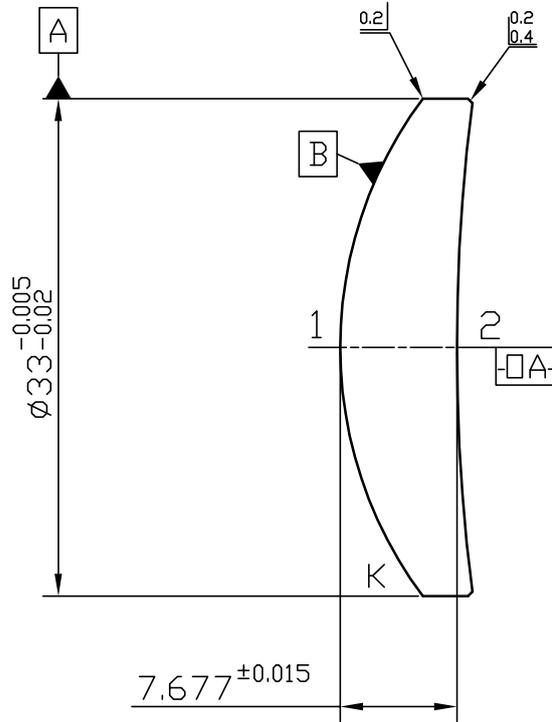

CTF = CRITICAL DIMENSION TO FUNCTION.

** SPECIFICATION ACC. ISO 10110 **

Left Surface	Material	Right Surface
R 27.7273 CX $\sqrt{R3}$ Øe 31.5	S-LAH98	R 129.2564 CC $\sqrt{R3}$ Øe 31.5
3/ 2(0.4/0.2)	Nd=1.95375±0.0003	3/ 2(0.4/0.2)
4/ -	Vd=32.32±0.3%	4/ 15"
5/ 2x0.1;C2x0.1;L5x0.025;E0.16	0/ 4	5/ 2x0.1;C2x0.1;L5x0.025;E0.16
λ -	1/ 2x0.1	λ 450-650nm,R(avg)<0.75%
To be cemented*	2/ 3;3	800-1350nm,R(avg)<0.5%
		coating dia. min Ø32.0

Appl	Surface		Scale 2:1	Issue
Product YY1-430001			Unit mm	Material
⑨			Title	
⑧				
⑦		Date	LENS-02	
⑥		Name		
⑤	Prepared by		No.	
④	Checked by			
③	Approved by		4 100 555 002	
②				
①			Subs for	
	Alteration No.	Name		